


## **MODULAR CABLING**





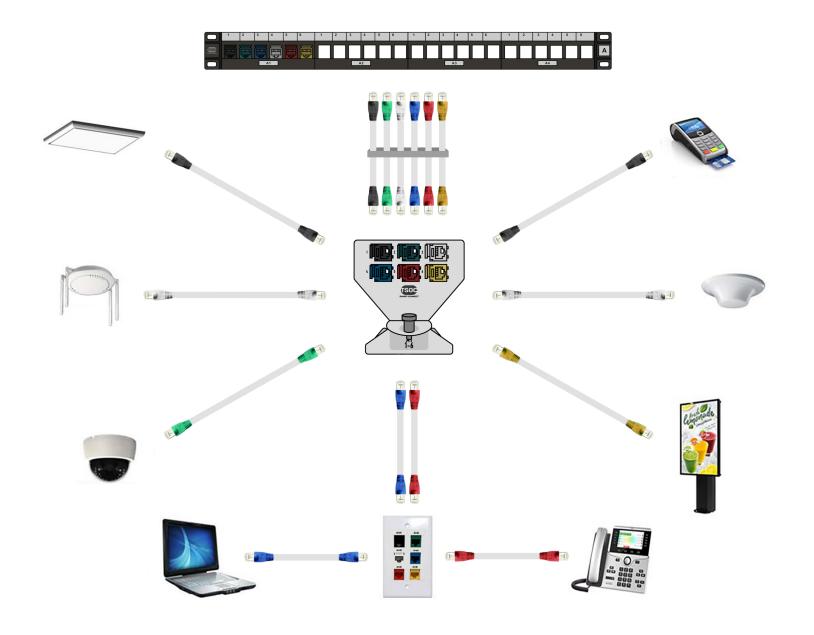

The zone cabling method involves bundled modular cable trunks to be connected between the patch panel in the telecom room and strategically placed consolidation points in the work area. Individual patch cables are connected between the consolidation points and work area outlets or devices. Deployment time is reduced by more than 50%, eliminating time consuming field termination, testing, and labelling. The Plug & Play modular cabling design simplifies the installation and allows quick and easy changes to the IT network.