


## TM602-KXSWH

### KEYSTONE WALL PLATE

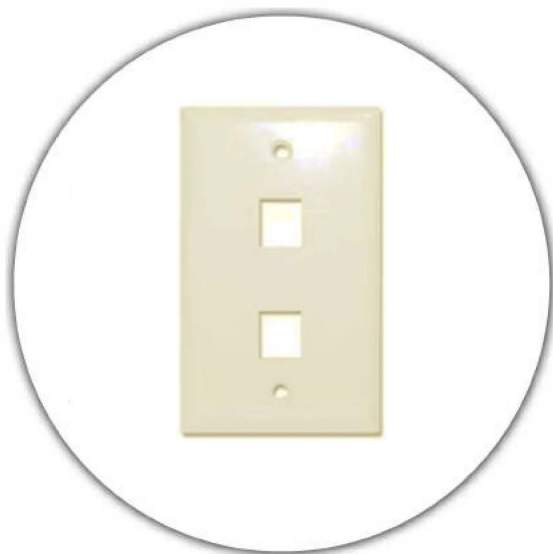

#### Description

TSOC Smart Connect keystone wall plates are designed to fit any single gang opening and accept any combination of Voice, Data or Audio/Visual keystone module.

| TSOC Part#  | Colour | U/M | Inner | Master |
|-------------|--------|-----|-------|--------|
| TM602-KXSWH | White  | EA  | 50    | 200    |

X=Ports(1,2,3,4,6)

#### Temperature Range

|                       |                                 |
|-----------------------|---------------------------------|
| Operating Temp Range: | -0° C to +0° C (+0° F to +0° F) |
|-----------------------|---------------------------------|

#### Mechanical Characteristics

|  |     |
|--|-----|
| Footprint Type:                          | TBD |
| Plug /Jack Compatibility:                | TBD |
| Termination Front Connection:            | TBD |
| Termination Front Connection Durability: | TBD |
| Termination Rear Connection:             | TBD |
| Termination Rear Connection Durability:  | TBD |
| Connector Retention:                     | TBD |

#### Materials

|                  |     |
|------------------|-----|
| Front Connection | TBD |
| Rear Connection  | TBD |
| Connector Body   | TBD |

#### Product Details

|              |  |
|--------------|--|
| Description: | TSOC Smart Connect keystone wall plate |
|--------------|--|

#### Physical Characteristics

|                |     |
|----------------|-----|
| Height:        | TBD |
| Width:         | TBD |
| Depth:         | TBD |
| Wiring Scheme: | TBD |
| Packaging:     | TBD |
| Weight:        | TBD |

#### Electrical Characteristics

|                        |     |
|------------------------|-----|
| Dielectric Strength:   | TBD |
| Current Rating:        | TBD |
| Insulation Resistance: | TBD |
| Contact Resistance:    | TBD |